



FastPac™ Inserting System DI500

Productivity Made Easy



Get The Most Out Of Your Mail

The DI500 FastPac™ Inserting System is a very efficient system with superior throughput that's easy to use. The state-of-the-art PacPilot™ user interface offers easy setup and job switching limiting the need for training and maximizing workforce flexibility. With superior loading capacity in the envelope, sheet and insert feeders, throughput and uptime is increased significantly.




DI500 FastPac™ Inserting System

- Maximum flexibility with 2 sheet feeders and 1 insert feeder.
- Speeds up to 3,600 pieces per hour.
- Monthly volumes of up to 42,500 pieces per month.
- Sheet feeder capacity up to 325 pages.
- Insert feeder capacity up to 300 inserts .
- Envelope feeder capacity up to 300 envelopes.
- OptiFlow™ Power Stacker with a vertical design, easily load and unload.
- OptiFlow™ Height-Adjustable Work Table.

PacPilot™ User Interface and Control Panel

- A large, back-lit LCD control panel with easy to follow icons and instructions
- Twenty programmable job presets to simplify your regular mailings
- SwiftStart™ function detects envelope and document sizes and automatically processes your mailing
- Convenient Trial Piece key to run test piece(s) so that you can check the machine setup
- Quick and easy Clear Deck key to drive materials through and clear the system
- Easily navigate to select up to 19 languages

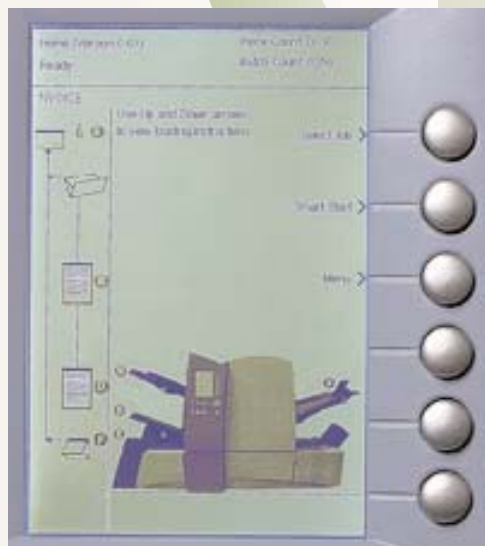

DI500 Inserter Specifications

Configuration: 2 Sheet Feeders, 1 Insert Feeder

- Maximum Dimensions: 30" H x 22.5"D x 77"L (including OptiFlow™ Power Stacker)
- Weight: 200 lbs.
- UL approved.
- Cycle Speed: Up to 60 pieces per min. (3600 per hour)
- DI500 OMR supports all basic and advanced tabletop inserter OMR.

Material Specifications:

- Paper Weight:
 - 16 to 32 lb. bond depending on application
 - Insert feeders handle booklets, slips, folded material
- Paper Dimension:
 - Sheet Feeder: Min: 5" x 6 7/8" Max: 9" x 16"
 - Insert Feeder: 5 x 3 1/4" to 9" x 6 1/2"
 - Envelope Sizes: #9, #10, 6" x 9 1/2" with a 1/4" border between edges of inserted materials and outer envelope.
- Convenience Feeder: Up to 5 sheets of 20 lb. paper including stapled sets with #10 envelope.

OptiFlow™ Work Table

- Operator Adjustable Height: 22"-30"
- Tabletop: 30" W x 60" L, or 30" W x 75" L
- Optional Locking Doors



Engineering the flow of communication™

www.PB.com

World Headquarters
Stamford, CT 06926-0700

For more information call toll-free:
1-800 MR BOWES (800-672-6937).

©2004 Pitney Bowes Inc. All Rights Reserved

Pitney Bowes, Engineering the flow of communication, FastPac, OptiFlow, SwiftStart and PacPilot are all trademarks or registered marks of Pitney Bowes Inc.

An Equal Opportunity Employer. Printed in U.S.A. AD11623 0904